




MF P206G

MultiFaster 2 lines, size 06, "G" type, with greaser and Zinc-Nickel plating.



Applications

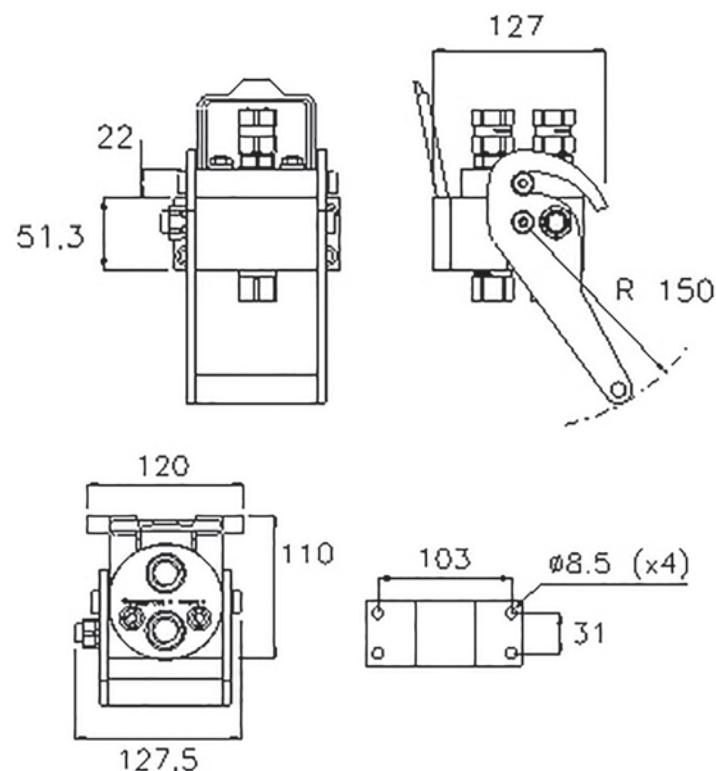

Technical Specifications

dash	Size mm	Size inch	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
						Male	Female	Male + Female
06	10	3/8"	25	40	0.008	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 1000 (ZnNi); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual

P206G

Size			Thread Type						FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type	Part Number
06	10	3/8"	2	2	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE		2P206G-2-12G FC

Size			Thread Type						MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type	Part Number
06	10	3/8"	2	2	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE		3P206G-2-12G MC

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT P206G F L	KIT LP206G	KIT TA P2	KIT SP4 7	KIT P206G M	SK MF 38	KIT VP4 7	KIT TSP 12 M	KIT GP4 7	

Couplings spare parts table is available on the Product catalogue (<https://www.fastercouplings.com/catalogs>), page 385

