




MF P208G

MultiFaster 2 lines, size 08, "G" type, with greaser and Zinc-Nickel plating.

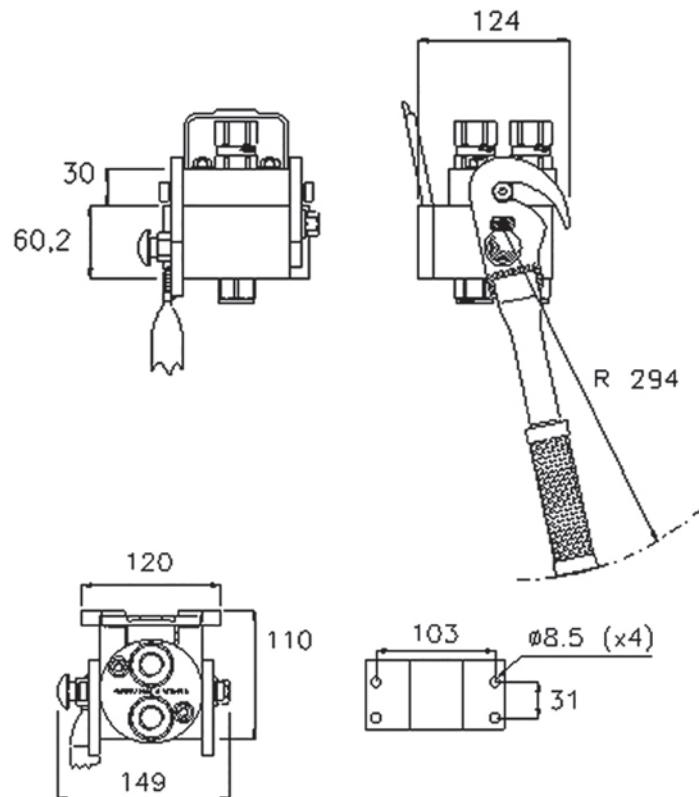

Technical Specifications

dash	Size mm	Size inch	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
						Male	Female	Male + Female
08	12.5	1/2"	25	70	0.01	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 1000 (ZnNi); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual

P208G

Size			Thread Type						FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type	Part Number
08	12.5	1/2"	2	2	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE		2P208G-2-12G FC

Size			Thread Type						MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type	Part Number
08	12.5	1/2"	2	2	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE		3P208G-2-12G MC

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT P208G F L	KIT LP208G	KIT TA P2	KIT SP5 7	KIT P208G M	SK MF 12	KIT VP8 7	KIT TSP 38 M	KIT GP4 7	

Couplings spare parts table is available on the Product catalogue (<https://www.fastercouplings.com/catalogs>), page 385

