




MF P306

MultiFaster 2 lines, size 06, 1 line size 08.

MultiFaster suitable for 2 lines size 06 and 1 line size 08.
Possibility to assemble the electrical connector within the 08 size housing.



Applications

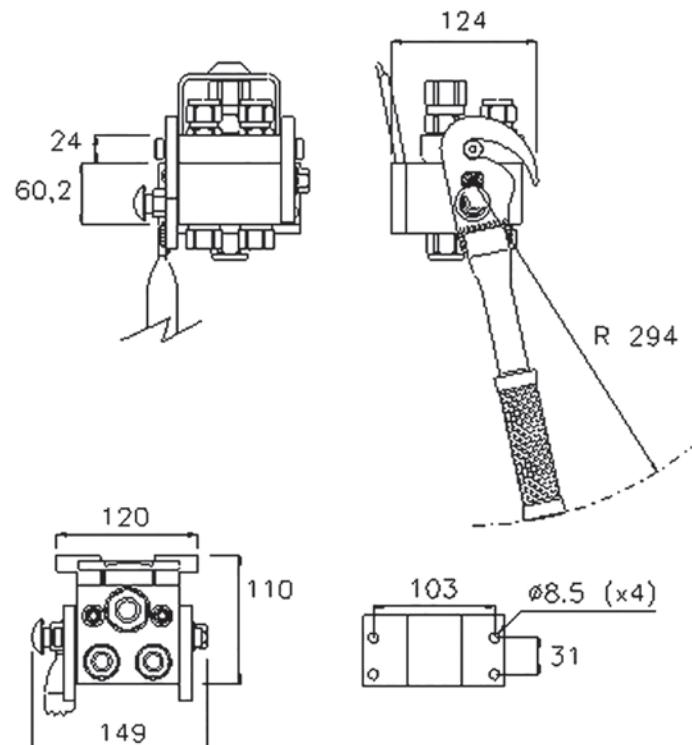

Technical Specifications

dash	Size mm	Size inch	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
						Male	Female	Male + Female
06	10	3/8"	25	40	0.008	100	100	100
08	12.5	1/2"	25	70	0.01	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual

P306

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Type	Part Number
06	10	3/8"	3	2	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE	1	3 PINS	2P306-1-2-38GFC
08	12.5	1/2"								
06	10	3/8"	3	2	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE	1	3 PINS	2P306-1-2-12GFC
08	12.5	1/2"								

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Type	Part Number
06	10	3/8"	3	2	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE	1	3 PINS	2P306-1-2-38GMC
08	12.5	1/2"								
06	10	3/8"	3	2	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE	1	3 PINS	2P306-1-2-12GMC
08	12.5	1/2"								

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT P306 F L	KIT L3P306	KIT TA P2	KIT SP5 S	KIT P306 M	SK MF 38	KIT VP8	KIT TSP 38 M	KIT GP4	

Couplings spare parts table is available on the Product catalogue (<https://www.fastercouplings.com/catalogs>), pages 381-383

