


MF P404



MultiFaster 4 lines, size 04.

Applications

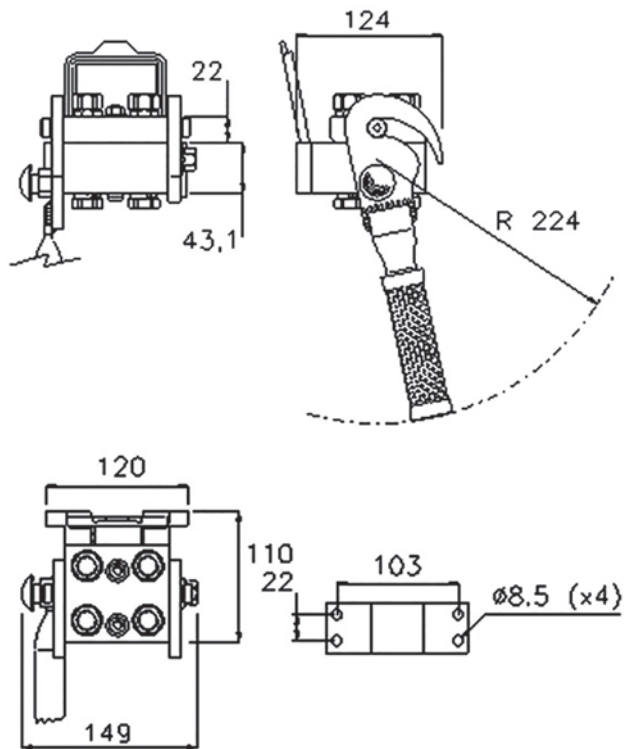

Technical Specifications

dash	Size		Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
						Male	Female	Male + Female
04	6.3	1/4"	25	20	0.008	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual



P404

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Type	Part Number
04	6.3	1/4"	4	4	F BSPP	ISO 1179-1	BSPP 1/4" FEMALE			2P404-4-14G F C
04	6.3	1/4"	4	3	13/ SAE	ISO 8434-2	1/2"-20 UNF MALE JIC			2P404-3-A F C

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Connector Type	Part Number
04	6.3	1/4"	4	4	F BSPP	ISO 1179-1	BSPP 1/4" FEMALE			2P404-4-14G M C
04	6.3	1/4"	4	3	20/ BSPP	ISO 8434-6	"BSPP 1/2"" FEMALE SWIVEL NUT			2P404-3-A M C

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT P404 F L	KIT L3P306	KIT TA P2	KIT SP5 S	KIT P404 M	SK MF 14	KIT VP8	KIT TSP 14 M	KIT GP4	S P404

Couplings spare parts table is available on the Product catalogue (<https://www.fastercouplings.com/catalogs>), pages 381-383

